

## **J30 Heated Seat Switch Bulb Replacement - Provided by Nico member Gerardjg**

### **Parts Needed**




**Figure 1**

**Radio Shack PN 272-1092 \$1.50 for 2 bulbs.**

### **Procedure**

**Remove the switch from the seat it comes straight up unplug the switch and bring it to a work area. Take off the lower black part of the switch from the plug side. There are 2 lock tabs holding the switch halves together. Just insert a small screw driver into the slot below the lock tab and gently pry up to move the black portion down slightly and now do the same on the other side. Once the tabs are free separate the 2 halves.**

**(Do not remove the switch rocker there are little springs and things in there)**

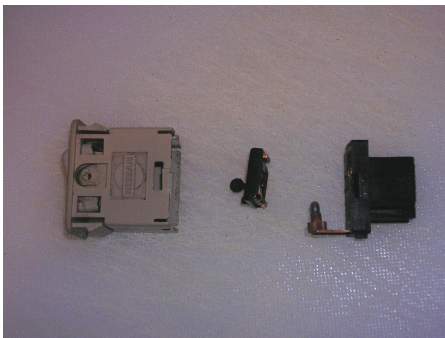

**Figure 2**

**Once you get the switch opened inside are the contacts in a plastic assembly that is the only part inside. On the black plug section of the switch are 2 brass posts attached to this is a piece of rubber with the bulb in the middle see fig 3. The rubber unplugs from the posts and the bulb leads are threaded thru 3 holes in the rubber, just like miniature Christmas bulbs see fig 4.**

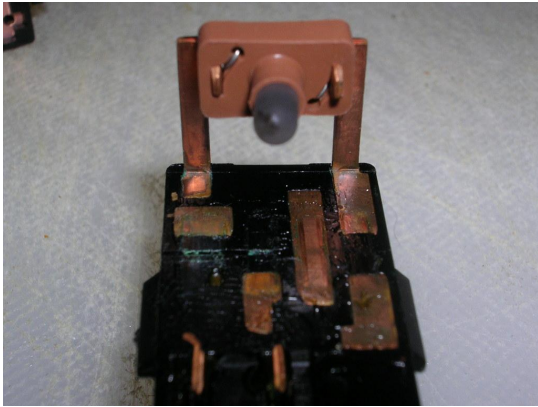


Figure 3



Figure 4

**Just remove the old bulb install the new one threaded the same way see fig 4, cut the excess wire and reassemble. Don't forget to clean any corrosion and lube the contacts. Place the contactors onto the lower assembly with the contactor lever arm on the right as in figure 5; make sure the switch is in the off position in order for the contact assembly lever arm to plug into the operating arm in the upper portion of the switch. The upper and lower portion will only fit together one way.**

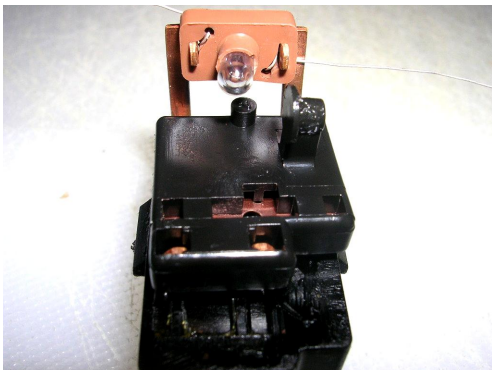


Figure 5

**Just press the upper portion down over the lower portion until it locks in place. Move The switch through its cycle on off on to make sure contactor lever mated with the switch operating arm.**

**Reinstall in your J and you should have light.**

